


# REYCO 21B TRAILER MECHANICAL SUSPENSION

**Reyco**  
**Granning**  
SUSPENSIONS

## REYCO 21B: A Suspension System You Can Trust

The 21B is a proven performer in the most challenging local & worldwide environments.

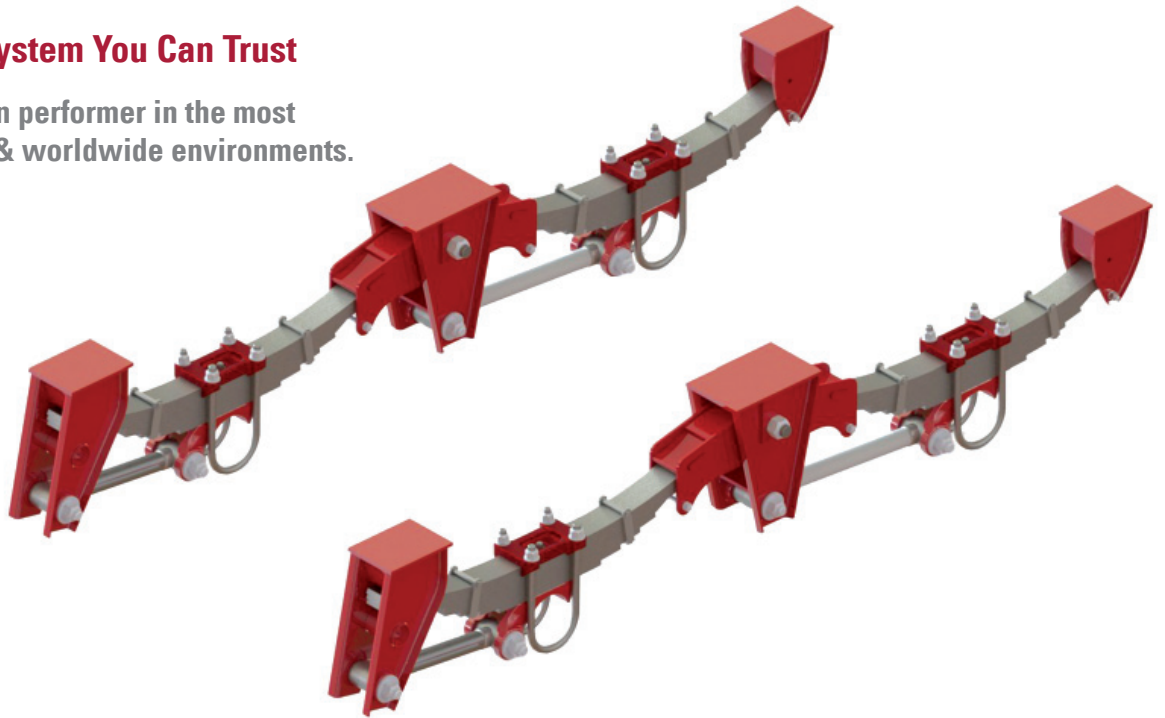

Reyco suspensions for trucks and trailers have been used successfully by fleets across the world under the toughest operating conditions.

In New Zealand, Reyco spring suspensions are available in models to suit single, tandem and tri axle arrangement in either underslung or overslung configurations.

### FEATURES INCLUDE:

- Robust & dependable components provide uncompromised performance & endurance
- The 21B literally floats on rubber, with full rubber bushings in all pivoted joints.
- Unique bush profile transfers maximum torque without metal to metal contact.
- Fully cast construction ensures maximum strength with longer, maintenance-free life
- Superior bush technology utilises steel inserts to extend life, preventing bush collapse.
- Comprehensive support throughout New Zealand

### OPTIONS:


- No-hop axle seats
- Square axle mounting
- Various spring configurations
- Stepped seats

Contact the Transpecs team for more information or support.


TRANSPORT TECHNOLOGY SOLUTIONS 0800 875 669 | [TRANSPECS.CO.NZ](http://TRANSPECS.CO.NZ)

 **Transpecs**


# REYCO 21B TRAILER MECHANICAL SUSPENSION

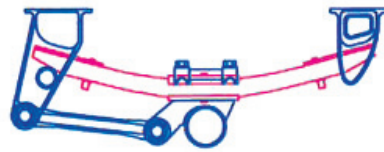


Featuring composite spring

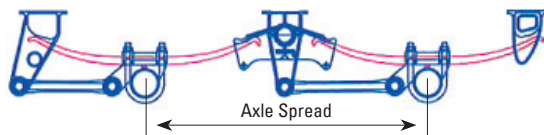


Featuring mono spring

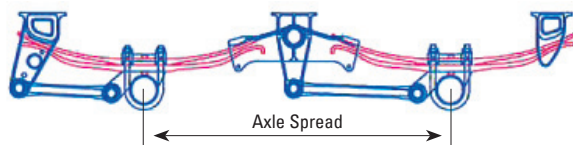

Featuring 2 leaf spring

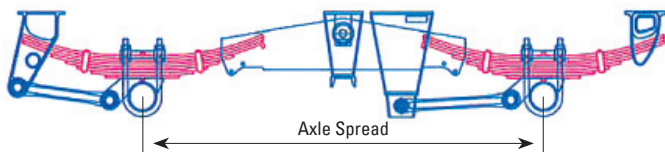

Featuring 8 leaf spring

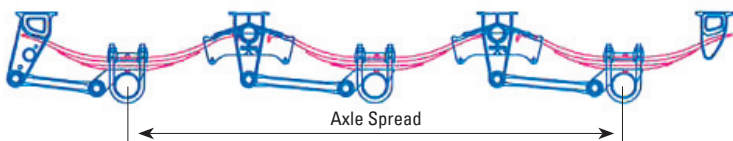

Featuring 3 leaf spring

## Single

Part No.	Weight
21B100C/1	92 kg
21B100C/2	118 kg
21B100C/3	122 kg
21B100C/8	164 kg
21B100C/C1	91 kg

## Tandem 1.24m Spread

Part No.	Weight
21B249C/1	231 kg
21B249C/2	263 kg
21B249C/3	267 kg
21B249C/8	355 kg
21B249C/C1	207 kg

## Tandem 1.37m Spread


Part No.	Weight
21B254C/1	247 kg
21B254C/2	280 kg
21B254C/3	288 kg
21B254C/8	372 kg
21B254C/C1	224 kg

## Tandem 1.80m Spread


Part No.	Weight
21B273C/1	293 kg
21B273C/2	325 kg
21B273C/3	334 kg
21B273C/8	411 kg

## Triaxle 2.50m Spread


Part No.	Weight
21B350C/1	358 kg
21B350C/2	406 kg
21B350C/3	417 kg
21B350C/8	539 kg
21B350C/C1	322 kg



Overslung  
conventional



Overslung  
inverted



Underslung

Contact the Transpecs team for more information or support.